



Network Video Recorder

SKYWORTH network video recorder, support the connection of up to 4CH/6CH/8CH/10CH/16CH/25CH/36CH IP cameras, with the Max. 4CH/16CH (main stream) playback at same time under the help of HDD. What amazing is that SKYWORTH NVR is able to add cameras (in the same LAN) with different IP segments.

In general, cameras with different IP segments can't get connected with the recorder and play video. If you want to check the video of the camera on the monitor via NVR, you need to ensure that the IP segment of the camera and NVR are the same. However, things change when you use SKYWORTH NVR, since the camera with different IP segments is able to directly play video on the NVR!



Solutions

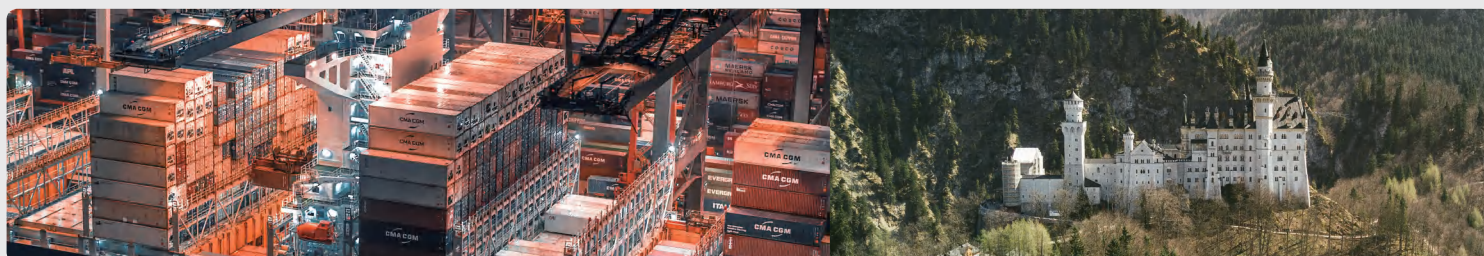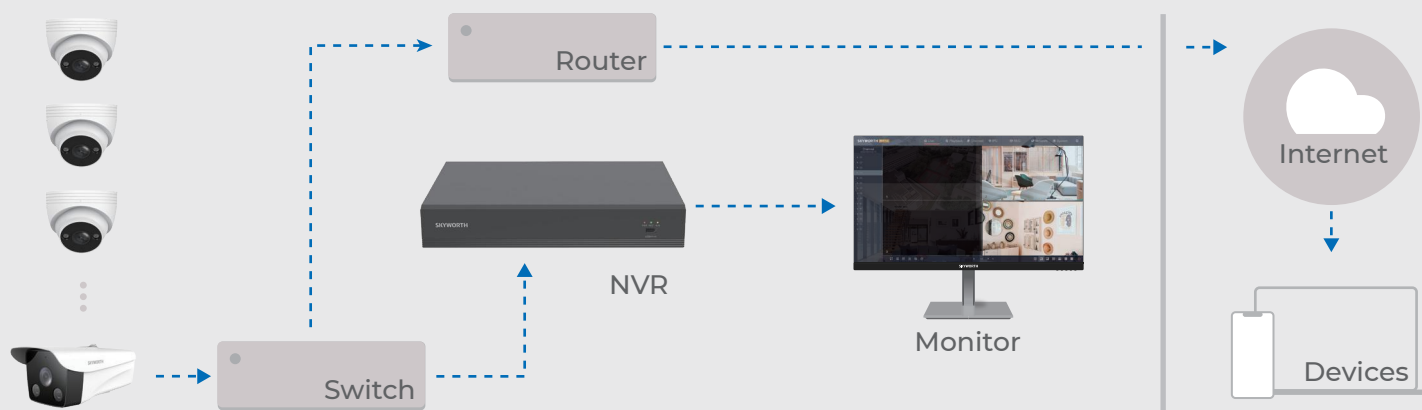

25/36CH Network Video Recorder



Cloud Playback



H.265+



4K HDMI Output



Support 10T HDD



Add Camera
across IP
Segments



APP Control



Main Specification	Model	SKH-N225K-A (25CH) & SKH-N236K-A (36CH)
	Resolution	Max. 8MP
	Channel	Max. 25/36CH
	Panel	1/4/6/8/9/10/12/16/25/36 Panel
	IPC Connection	25CH*8MP / 36CH*8MP
	Live View	1 Panel: 1CH*8MP 4 Panel: 2CH*8MP + 2CH*4MP 6 Panel: 6CH*5MP 8 Panel: 8CH*5MP 9 Panel: 8CH*5MP + 1CH*3MP 10 Panel: 8CH*5MP + 2CH*3MP 12 Panel: 8CH*5MP + 4CH*3MP 16 Panel: 16CH*4MP 25 Panel: 16CH*4MP + 9CH*3MP 36 Panel: 16CH*4MP + 20CH*720P
	Playback	1 Panel: 1CH*8MP 4 Panel: 4CH*5MP 8 Panel: 8CH*5MP 16 Panel: 16CH*4MP
	Incoming Bandwidth	768Mbps
	Outgoing Bandwidth	768Mbps
	Audio	Audio Out*1 + Audio In*1
	Certificate	CE, RoHS, EAC
	Material	Metal
	Ethernet	1*10/100Mbps (RJ45) + 1*10/100/1000Mbps (RJ45)
	HDD	Support Max. 10T HDD*2
	Alarm	IPC side Human & Vehicle Detection / Motion Detection / Area Detection / Line Crossing
		NVR side Video loss / HDD error / HDD full / No HDD / IP conflict
Others	Language	English / German / French / Spanish / Arabic / Russian / Vietnamese / Italian / Japanese / Turkish
	ONVIF	Profile S
	Protocol	TCP / IP, DHCP, HTTP, HTTPS, NTP, DNS, RTP, RTSP, P2P
	APP	AI Home Camera
General Specification	Power	DC 12V/4A
	Working Humidity	<90% (non-condensing)
	Working Temperature	-5°C~40°C
	Power Consumption	Max. 48W
	Dimension	325*243*54mm
	Net Weight	About 1160g
	Gross Weight	About 1857g
	IP Grade	Indoor